


DOT-WS RUBBER WHEELSTOP

TYPE	Dottac Premium Rubber Wheel Stop
MATERIAL	8 Recycled rubbers: 50.6% Calcium Carbonate; Sulphur 20-30%; Carbon black: 1.2%: 10-20%
FINISH	Machined / Cast
FIXING	Bolted
WEIGHT	14kg
DIMENSIONS	1650L x 150W x 100H



- High visibility yellow panels
- Solid moulded construction (one piece)
- Lightweight making it easy to install but remaining highly durable
- Designed as to the Australian Standards
- Fade, UV, oil, moisture, extreme temperatures and weather resistant
- Fixed with 3 x 150mm Dyna Bolts for concrete or 3 x 14mm x 300mm Spikes for Asphalt
- Installation and Service available

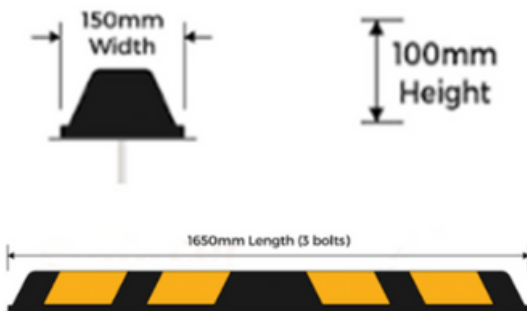

DOTTAC
ABN: 42 153 893 933

T:08 6384 6349

Registered Address:
14 Kirke Street
Balcatta WA 6021

info@dottac.com.au
admin@dottac.com.au
www.dottac.com.au