



DOT-N23 STAIR NOSING

Introducing Dottac's N23CY AND N23CB Stair Nosing, a durable and robust aluminium structure designed to withstand high-traffic environments coming with 2 color inserts, yellow and black. The carborundum insert surpasses the Australian Standards for anti-slip surfaces, ensuring optimal safety. DOT-N23 can be installed in various ways, including fixing adhesive, on multiple surfaces like concrete, timber, tiles, and carpets, making it a versatile option for both interior and exterior applications.

SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.


TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= Yellow = 69 Black = 66
TRL 55 SLIDER	Yellow = 69 Black = 86

TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= Yellow = 0.85 = D1 = Black = 0.80 = D1

LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
YELLOW	
LUMINANCE REFLECTANCE RATING / WET	= 30.6
LUMINANCE REFLECTANCE RATING / DRY	= 32.2
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 3.2
LUMINANCE REFLECTANCE RATING / DRY	= 3.5

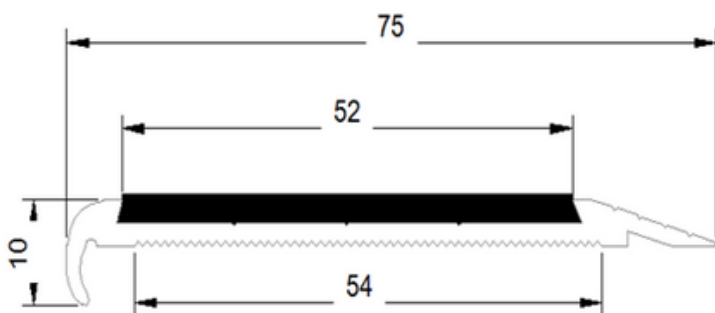

PRODUCT	Aluminium Profile
MATERIAL	Clear Aluminium
FINISH	Mill Finish
SIZE	75mm x 10mm
INSERT	52mm Carborundum Yellow or Black
FIXING	Adhesive



DOTTAC
 ABN: 42 153 893 933
 Registered Address:
 14 Kirke Street
 Balcatta WA 6021

T:08 6384 6349
info@dottac.com.au
admin@dottac.com.au
www.dottac.com.au