



# DOT-N23 STAIR NOSING

Introducing Dottac's N23CY AND N23CB Stair Nosing, a durable and robust aluminium structure designed to withstand high-traffic environments coming with 2 color inserts, yellow and black. The carborundum insert surpasses the Australian Standards for anti-slip surfaces, ensuring optimal safety. DOT-N23 can be installed in various ways, including fixing adhesive, on multiple surfaces like concrete, timber, tiles, and carpets, making it a versatile option for both interior and exterior applications.

## SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.


TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= Yellow = 69 Black = 66
TRL 55 SLIDER	Yellow = 69 Black = 86

TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= Yellow = 0.85 = D1 = Black = 0.80 = D1


## LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>YELLOW</b>	
LUMINANCE REFLECTANCE RATING / WET	= 30.6
LUMINANCE REFLECTANCE RATING / DRY	= 32.2
<b>BLACK</b>	
LUMINANCE REFLECTANCE RATING / WET	= 3.2
LUMINANCE REFLECTANCE RATING / DRY	= 3.5

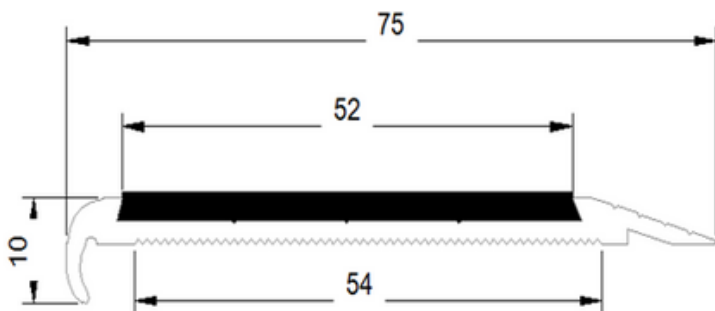

<b>PRODUCT</b>	Aluminium Profile
<b>MATERIAL</b>	Clear Aluminium
<b>FINISH</b>	Mill Finish
<b>Size</b>	75mm x 10mm
<b>INSERT</b>	52mm Carborundum Yellow or Black
<b>FIXING</b>	Adhesive

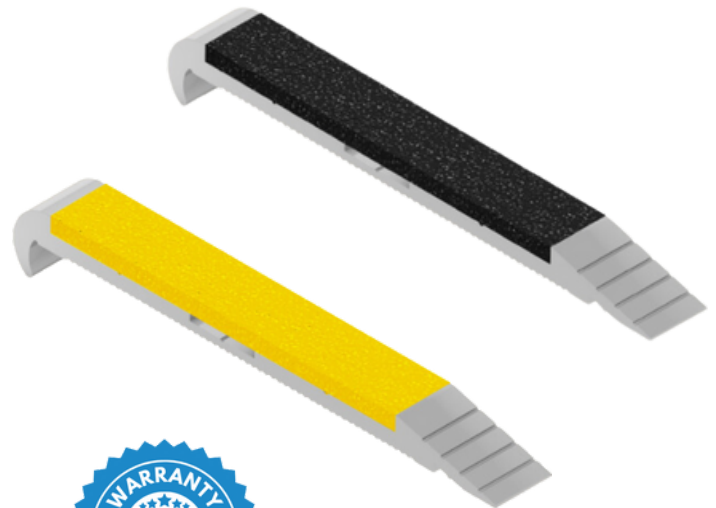

**DOTTAC**  
 ABN: 42 153 893 933  
 Registered Address:  
 14 Kirke Street  
 Balcatta WA 6021

T: 0423 418 168  
[info@dottac.com.au](mailto:info@dottac.com.au)  
[admin@dottac.com.au](mailto:admin@dottac.com.au)  
[www.dottac.com.au](http://www.dottac.com.au)