



# DOT-N26 STAIR NOSING

Dottac N26 Stair Nosing is a premium-grade product fabricated from reinforced, heavy-duty aluminium, specifically engineered to withstand high-traffic areas while adhering to the Australian Standards for anti-slip surfaces. The aluminum profiles undergo an anodized treatment, with a thickness of 18-20 microns, to provide additional durability. Installation of the N26 Nosing is done using Adhesive and can be mounted on an array of surfaces, including concrete, timber, and tile, both internal & External application.

## SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
<b>FOUR S 96 SLIDER</b>	= Black = 55 = Gold = 47 = Natural = 55
<b>TRL 55 SLIDER</b>	= Black = 46 = Gold = 48 = Natural = 49
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
<b>MEAN COF</b>	= Black = 0.65 = D1 = Gold = 0.60 = D1 = Natural = 0.65 = D1


## LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>BLACK</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 4.1
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 4.9
<b>GOLD</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 40.6
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 40.3
<b>NATURAL</b>	
<b>LUMINANCE REFLECTANCE RATING / WET</b>	= 69.4
<b>LUMINANCE REFLECTANCE RATING / DRY</b>	= 64.8



<b>PRODUCT</b>	Extrusion Profile Stair Nosing
<b>MATERIAL</b>	Black or Gold or Natural Aluminium
<b>FINISH</b>	Mill Finish
<b>SIZE</b>	52mm x 2.6mm
<b>FIXING</b>	Adhesive

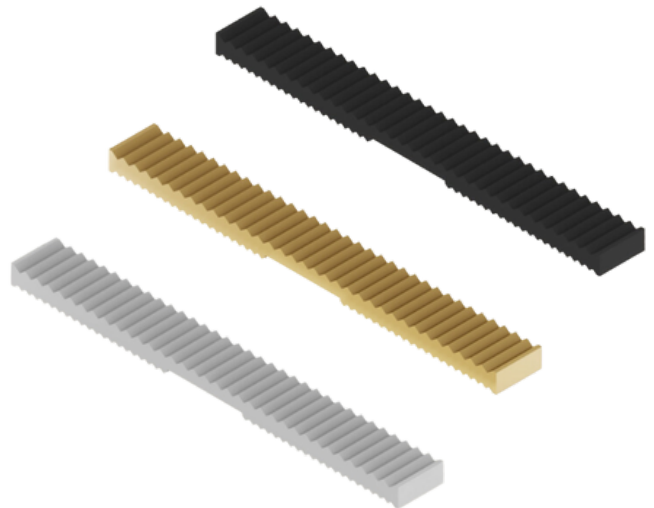

**DOTTAC**  
 ABN: 42 153 893 933  
 Registered Address:  
 14 Kirke Street  
 Balcatta WA 6021

T: 0423 418 168  
[info@dottac.com.au](mailto:info@dottac.com.au)  
[admin@dottac.com.au](mailto:admin@dottac.com.au)  
[www.dottac.com.au](http://www.dottac.com.au)