



# DOT-N27 STAIR NOSING

Introducing Dottac's N27C & N27B Stair Nosing a top-of-the-line quality product, made with reinforced, heavy-duty aluminium. This product is specifically created to withstand high-traffic areas while fulfilling Australian Standards for anti-slip surfaces. The profiles are treated with an anodized 18-20 microns thickness for added durability to protect your floors and provide a professional finish. N28 Nosing is installed using Adhesive can be installed on various surfaces, such as concrete, timber, and tile both Internal & External area.

## SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

**TEST** AS 4586 APPENDIX A: Wet Pendulum Test

**FOUR S 96 SLIDER** = Natural = 46  
= Black = 36

**TRL 55 SLIDER** = Natural = 48  
= Black = 38

**TEST** AS 4586 APPENDIX B: Dry Floor Friction Test

**MEAN COF** = Natural = 0.60 = D1  
= Black = 0.55 = D1

## LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002


**TEST** AS 1428.1 APPENDIX B PARAGRAPH B3

**NATURAL**  
**LUMINANCE REFLECTANCE RATING / WET** = 54.3


**LUMINANCE REFLECTANCE RATING / DRY** = 54.3

**BLACK**  
**LUMINANCE REFLECTANCE RATING / WET** = 3.0

**LUMINANCE REFLECTANCE RATING / DRY** = 3.6

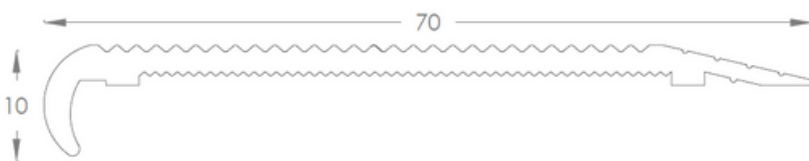

<b>PRODUCT</b>	Extrusion Profile Stair Nosing
<b>MATERIAL</b>	Clear or Black Aluminium
<b>FINISH</b>	Mill Finish
<b>SIZE</b>	70mm x 10mm
<b>FIXING</b>	Glue

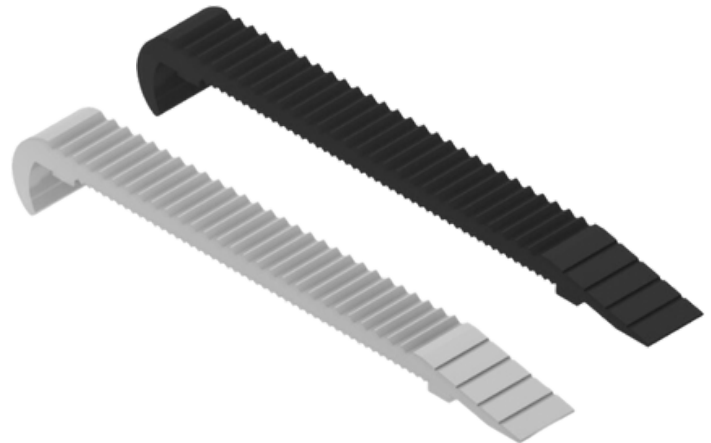

**DOTTAC**  
ABN: 42 153 893 933

T:08 6384 6349

Registered Address:  
14 Kirke Street  
Balcatta WA 6021

info@dottac.com.au  
admin@dottac.com.au  
[www.dottac.com.au](http://www.dottac.com.au)