



DOT-N27 STAIR NOSING

Introducing Dottac's N27C & N27B Stair Nosing a top-of-the-line quality product, made with reinforced, heavy-duty aluminium. This product is specifically created to withstand high-traffic areas while fulfilling Australian Standards for anti-slip surfaces. The profiles are treated with an anodized 18-20 microns thickness for added durability to protect your floors and provide a professional finish. N27 Nosing is installed using Adhesive can be installed on various surfaces, such as concrete, timber, and tile both Internal & External area.

SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

TEST AS 4586 APPENDIX A: Wet Pendulum Test

FOUR S 96 SLIDER = Natural = 46
= Black = 36

TRL 55 SLIDER = Natural = 48
= Black = 38

TEST AS 4586 APPENDIX B: Dry Floor Friction Test

MEAN COF = Natural = 0.60 = D1
= Black = 0.55 = D1

LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002


TEST AS 1428.1 APPENDIX B PARAGRAPH B3

NATURAL
LUMINANCE REFLECTANCE RATING / WET = 54.3


LUMINANCE REFLECTANCE RATING / DRY = 54.3

BLACK
LUMINANCE REFLECTANCE RATING / WET = 3.0

LUMINANCE REFLECTANCE RATING / DRY = 3.6

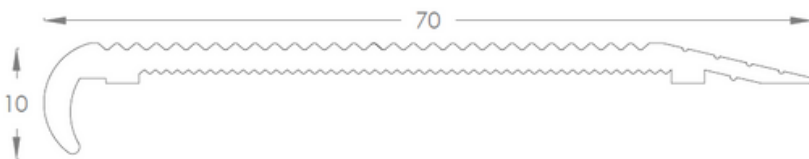

PRODUCT	Extrusion Profile Stair Nosing
MATERIAL	Clear or Black Aluminium
FINISH	Mill Finish
SIZE	70mm x 10mm
FIXING	Glue

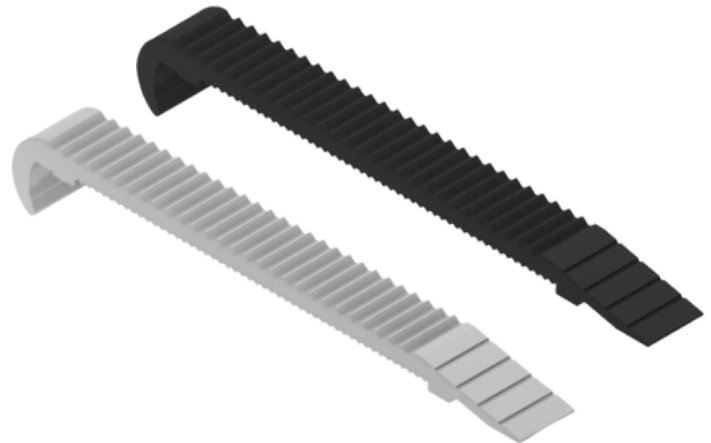

DOTTAC
ABN: 42 153 893 933
Registered Address:
14 Kirke Street
Balcatta WA 6021

T: 0423 418 168
info@dottac.com.au
admin@dottac.com.au
www.dottac.com.au