



# DOT-N28 STAIR NOSING

Dottac N28 Stair Nosing is a top-of-the-line product made of reinforced, heavy-duty aluminum that is specifically designed to endure high-traffic areas while fulfilling the Australian Standards for anti-slip surfaces. The aluminum profiles undergo an anodized 18-20 microns thickness treatment for added durability. Installing the N28 Nosing is easy using adhesive (installation documents are included), and can be installed on various surfaces, such as concrete, timber, and tile both indoors and outdoors applications.

## SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= Black = 55 = Gold = 47 = Natural = 55
TRL 55 SLIDER	= Black = 46 = Gold = 48 = Natural = 49
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= Black = 0.65 = D1 = Gold = 0.60 = D1 = Natural = 0.65 = D1


## LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
<b>BLACK</b>	
LUMINANCE REFLECTANCE RATING / WET	= 4.1
LUMINANCE REFLECTANCE RATING / DRY	= 4.9
<b>GOLD</b>	
LUMINANCE REFLECTANCE RATING / WET	= 40.6
LUMINANCE REFLECTANCE RATING / DRY	= 40.3
<b>NATURAL</b>	
LUMINANCE REFLECTANCE RATING / WET	= 69.4
LUMINANCE REFLECTANCE RATING / DRY	= 64.8



<b>PRODUCT</b>	Extrusion Profile Stair Nosing
<b>MATERIAL</b>	Natural or Gold or Black Aluminium
<b>FINISH</b>	Mill Finish
<b>SIZE</b>	52mm x 2.6mm
<b>FIXING</b>	Adhesive

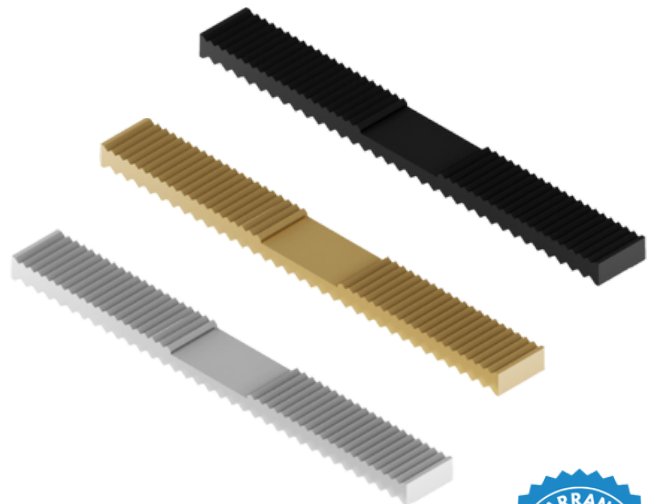

**DOTTAC**  
 ABN: 42 153 893 933  
 Registered Address:  
 14 Kirke Street  
 Balcatta WA 6021

T: 0423 418 168  
[info@dottac.com.au](mailto:info@dottac.com.au)  
[admin@dottac.com.au](mailto:admin@dottac.com.au)  
[www.dottac.com.au](http://www.dottac.com.au)