



DOT-N29 STAIR NOSING

Dottac N29 Stair Nosing is a robust and durable solution tailored for high foot traffic zones. Reinforced aluminium construction guarantees longevity and endurance under heavy usage. The anodized aluminum profiles are 18-20 microns in thickness, and the Carborundum tape surpasses beyond the Australian Standards. The insert, which measures 53mm wide, is fabricated from sturdy carbide anti-slip tape grit and is available in both black and yellow.

SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.


TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= Yellow = 70 = Black = 70
TRL 55 SLIDER	= Yellow = 81 = Black = 76

TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= Yellow = 0.90 = D1 = Black = 0.85 = D1

LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002

TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
YELLOW	
LUMINANCE REFLECTANCE RATING / WET	= 36.7
LUMINANCE REFLECTANCE RATING / DRY	= 38.2
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 3.9
LUMINANCE REFLECTANCE RATING / DRY	= 5.3

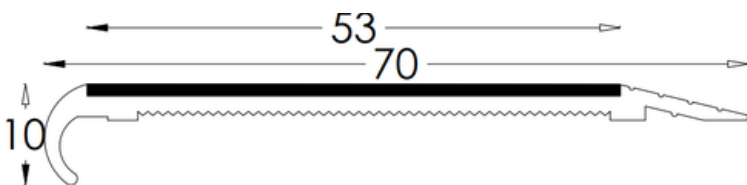

PRODUCT	Extrusion Profile Stair Nosing
MATERIAL	Clear or Black Aluminium
FINISH	Mill Finish
SIZE	70mm x 10mm
INSERT	Yellow or Black Anti-Slip Carborundum Tape
FIXING	Adhesive



DOTTAC
ABN: 42 153 893 933

T:08 6384 6349

Registered Address:
14 Kirke Street
Balcatta WA 6021

info@dottac.com.au
admin@dottac.com.au
www.dottac.com.au