



DOT-N24-A STAIR NOSING

Dottac N24 Stair Nosing is a robust and durable solution tailored for high foot traffic zones. Reinforced aluminium construction guarantees longevity and endurance under heavy usage. The anodised aluminium profiles are 18-20 microns in thickness, and the aluminium insert surpasses beyond the Australian Standards. It measures at 52mm wide and is extruded from 6063/T5 grade aluminium, and is design for both internal and external use.

SLIP RESISTANCE


Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	= Black = 55
TRL 55 SLIDER	= Black = 46
TEST	AS 4586 APPENDIX B: Dry Floor Friction Test
MEAN COF	= Black = 0.65 = D1

LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC) 3.2 and the AS/NZ 1428.4.2002


TEST	AS 1428.1 APPENDIX B PARAGRAPH B3
BLACK	
LUMINANCE REFLECTANCE RATING / WET	= 2.9
LUMINANCE REFLECTANCE RATING / DRY	= 3.2

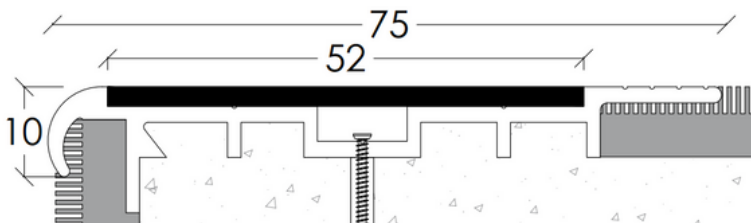

PRODUCT	Extrusion Profile Stair Nosing
MATERIAL	Clear or Gold Aluminium
FINISH	Mill Finish
Size	75mm x 10mm
INSERT	N28 52mm x 2.6mm
FIXING	Adhesive & Screw



INSERT OPTIONS:

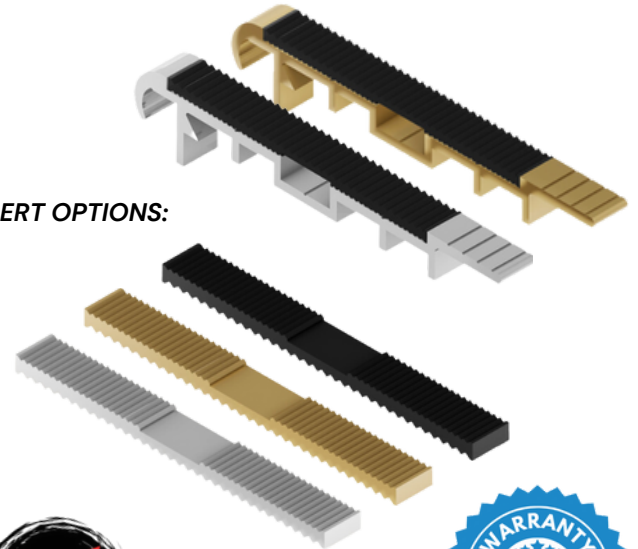

DOTTAC
ABN: 42 153 893 933
Registered Address:
14 Kirke Street
Balcatta WA 6021

T:08 6384 6349

info@dottac.com.au
admin@dottac.com.au
www.dottac.com.au