
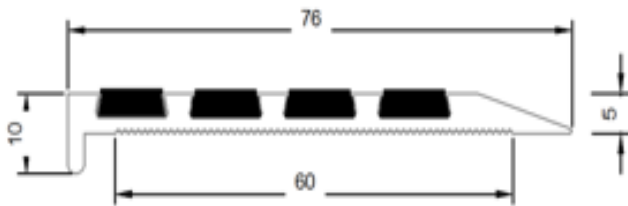


DOT- N25 Stair Nosing with 4 Strip

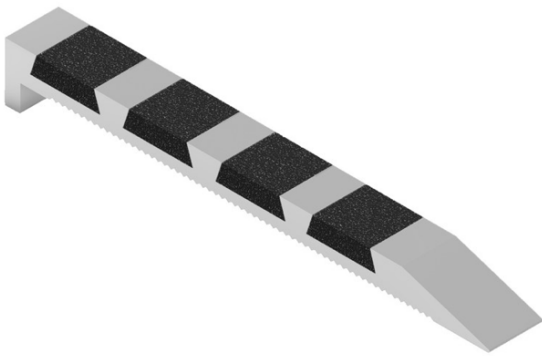

TECHNICAL DATA SHEET

Product	Aluminum extrusion profile with 4 strip
Type	Stair Nosing
Material	The Aluminium Mill Finish profile is extruded from 6063 /T5 grade
Available Colour	Clear with Black strip
Dimension	76mm x 10mm x 5mm
Classification	AS 4586 Wet Pendulum Test P5
Location	For Internal & External area
TESTED	AS 4586

FEATURES

Dottac Stair Nosing Reinforced heavy-duty aluminum designed for high-traffic areas. The carborundum insert exceeds the requirements of the Australian Standards for anti-slip surfaces. **DOT-N25** can be installed using screw and glue or glue to multiple surfaces such as concrete, Timber, Tiles, and Carpets. **DOT-N25** is suitable for interior and exterior purposes.

Aluminum profiles are anodized 18-20 microns thickness treatment

The insert is 76mm wide, made from heavy-duty carbide anti-slip grit available in 2 different colors Clear and Gold.

INSTALLATION

DOT-N25 Stair Nosing is installed using 2 methods; Screw and glue using 6mm plug zinc screws 25mm and Hexflex hPU. Or, Glue using Hexflex hPU. Refer to installation documents.

SLIP RESISTANCE TEST

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.

LUMINANCE TESTING

DOT-N25 Luminance contrast of at least 30% the 4 bar black Carborundum infill requirement as Australian Standards 4586:2004