



# DOT0106 INTEGRATED TACTILE

Dottac Polyurethane Warning Tactile (DOT0106) is a high-quality, slip-resistant solution made from Polyurethane. Its concentric groove design provides an excellent product that ensures safety for all users. It's ideal for both outdoor and indoor environments, it is resistant to corrosion and easy to install and maintain. Compliant with Australian Standards, it is suitable for public spaces, transportation hubs, and commercial buildings.

## FEATURES

- Machined, with concentric circle design on the horizontal face with a smooth outer edge
- Tested for compliance with AS 1428.4
- Tested for compliance with the NCC Section D clause 3.8 (TGSIs)
- Tested for compliance with slip resistance requirements as detailed in HB 198
- Substrates: Stone, Masonry, Timber, Vinyl, Carpet Tile, Porcelain, Ceramic, Glass Material
- WARRANTY 2 years warranty on the product**

## SLIP RESISTANCE

Important information: To determine a classification of a slip resistance rating, see Australian Standards AS 4586: 2004 Slip Resistance Classification of New Pedestrian Surface Materials.


TEST	AS 4586 APPENDIX A: Wet Pendulum Test
FOUR S 96 SLIDER	54 CLASS =P4
TRL 55 SLIDER	68 CLASS =P5

## LUMINANCE TESTING

Luminance contrast requirement of the National Construction Code (NCC ) 3.2 and the AS/NZ 1428.4.2002

TEST	AS/NZS 1428.4.1 APPENDIX E PARAGRAPH E3
LUMINANCE REFLECTANCE RATING / WET	43.7
LUMINANCE REFLECTANCE RATING / DRY	44.4

<b>TYPE</b>	Polyurethane
<b>MATERIAL</b>	Grey Polyurethane
<b>FINISH</b>	Injection Moulded
<b>FIXING</b>	Adhesive
<b>DIMENSIONS</b>	300 x 300mm

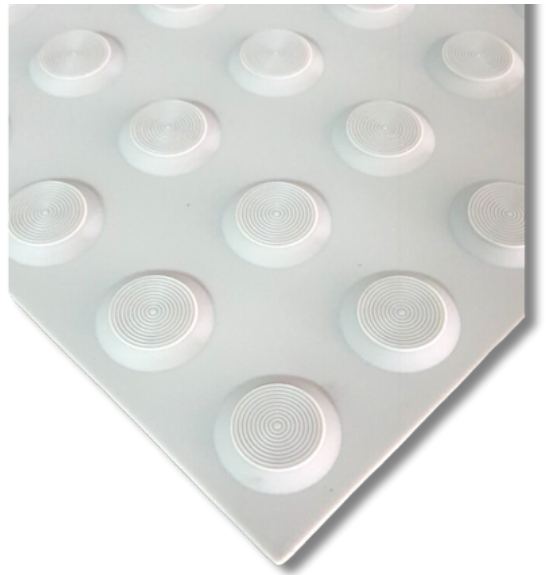

**DOTTAC**  
 ABN: 42 153 893 933  
 Registered Address:  
 14 Kirke Street  
 Balcatta WA 6021

T:08 6384 6349  
[info@dottac.com.au](mailto:info@dottac.com.au)  
[admin@dottac.com.au](mailto:admin@dottac.com.au)  
[www.dottac.com.au](http://www.dottac.com.au)